


TECHNICAL DATASHEET · INTERIOR ARCHITECTURAL LIGHTING - OFFICE LINE SERIES

Office Line 2200 Suspended LED Luminaire 80W Offices

EcoSolaris code: ECO-LED-57014 · Designed and manufactured in Europe · OSRAM LEDs

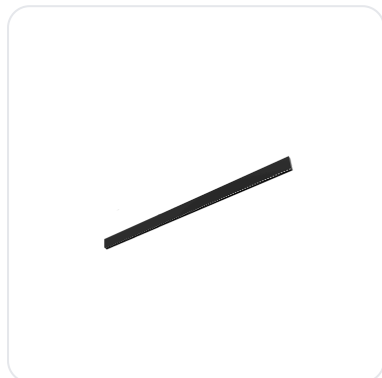

Suspended linear LED luminaire of 2200 mm for offices, with direct and indirect emission (up and down), 80 W, 5276 lm, 66 lm/W, 4000 K, CRI 90 and SDCM under 3 (ANSI). Anodised aluminium profile of 2200 x 25 x 100 mm, 24 V DC supply with separate driver, IP20, class I.

Price on request

Minimum order 10 pcs

Made to order

EcoSolaris technical support

Technical specifications

Mounting type	Suspended
Housing material	Anodised aluminium
Colour	Anodised black (RAL9010)
Power	80 W
Luminous flux	5276 lm
Luminous efficacy	66 lm/W
Optic	Wide
Light direction	Up and down
Colour temperature	4000 K
CRI	90
Colour consistency	SDCM under 3 (ANSI)
Control	On/off
Supply voltage	24 V DC
Power supply	Not included
Ingress protection	IP20
Electrical insulation class	I
Adjustable	No
Available accessories	Suspension mounting kit
Dimensions	2200 x 25 x 100 mm

Features

- Direct and indirect emission (up and down)
- Linear profile of 2200 mm, 25 mm wide
- CRI 90 and SDCM under 3 for uniform colour
- 80 W, 5276 lm, 4000 K
- 24 V DC supply with separate driver
- Anodised aluminium, IP20, class I

Recommended applications

Open-plan offices

Meeting rooms

Receptions

Coworking spaces

Libraries